

Features

The Agora nursing care bed is specially designed for use in homes or other related uses.

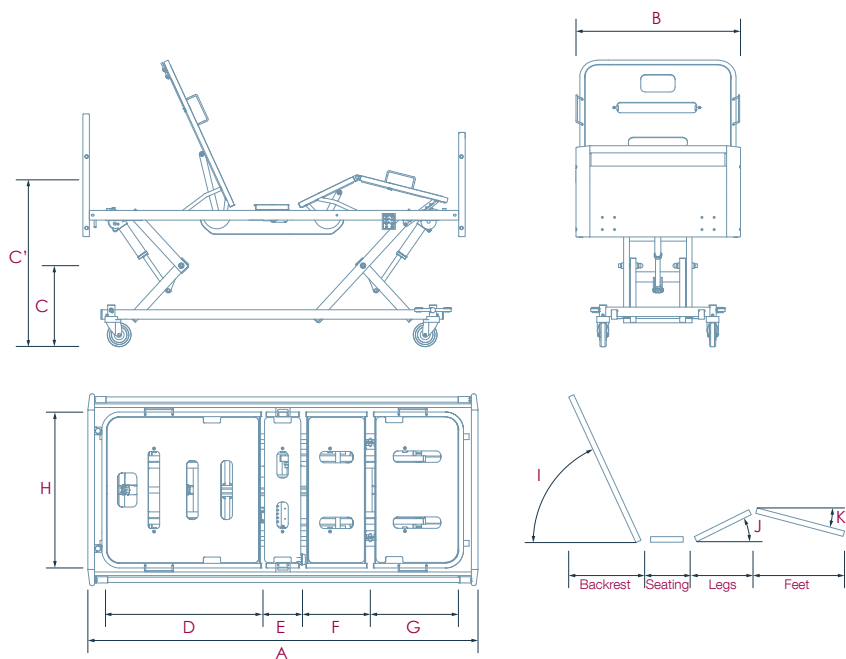
- Bed base divided into four articulated planes that are operated electronically.
- There are two supports for the drip support, support handle, etc.
- Brake pedal with simultaneous braking of the two wheels of the foot board or backrest or optionally with a centralised brake on the four wheels.
- Arm elevation system, providing high stability.
- IP-X4 motorised system.
- Electrical Trendelenburg and reverse Trendelenburg positioning system with the possibility of tilting of 14° and 16° respectively.

There are two options for controls that can be built into the bed:

- The Basic option, in which the electronic control of the different functions is performed by a control attached to the bed by a cable.
- The Basic Plus option, in which the electronic control of the different functions is performed by two controls.

Technical information








| | |
|----------------------------------------------------------------|---------------------------|
| Total length with headboard and footboard (A) | 2200 ± 5 mm. |
| Total width with wooden rails (B) | 1010 ± 5 mm. |
| Total width with tubing rails (B) | 960 ± 5 mm. |
| Minimum rest surface height (Ruedas de 125) (C) | 320 ± 5 mm. |
| Maximum rest surface height (Ruedas de 125) (C') | 750 ± 5 mm. |
| Crane passing clearance height (Ruedas de 100 / 125 / 150 mm.) | 120 / 145 / 170 mm. |
| Bed base section length (D / E / F / G) | 851 / 204 / 357 / 489 mm. |
| Bed base section width (H) | 830 mm. |
| Backrest tilting angle (I) | 70° ± 3° |
| Extremities tilting angle (J) | 26° ± 3° |
| Feet tilting angle (K) | 14° ± 3° |
| Trendelenburg / Anti-trendelenburg | 14° / 16° ± 2° |
| Bed unladen weight | 100 kg. |
| Maximum patient weight (MPW) | 140 kg. |
| Safety weight load (SWL) | 230 kg. |
| Mattress dimensions | 1900 x 830 mm. |















Electrical information

| | |
|------------------------------------------------|---------------------------|
| Lifting system | By linear motor |
| Backrest and extremities lifting system | By compact motor |
| Feet lifting system | Manual rastomat |
| Voltage and frequency | 230 V / 50 - 60 Hz |
| Electric shock protection / liquid penetration | Class II / Type B/ IPX4 |
| Maximum consumption | Max. 3 15A (maximum 400W) |
| Motor intermittent operation | 10% 2 min. - 18 min. |

Standard

| Controls | Protection | Transport | Wellness | Others | Accessories |
|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------|----------------------------------------------------------------------------------------------------|
|  Basic patient control |  Wooden Rails |  Ø150 mm centralised brake |  HPL bed base | |  IV Pole |
| |  Beech headboard and footboard | | | |  Trapeze Bar |

Optional

| Controls | Protection | Transport | Wellness | Others |
|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
|  Basic Plus patient control |  Tubing rails |  Ø125 mm centralised brake |  Slats bed base |  Battery |
| |  Aluminium headboard and footboard |  Ø100 mm individual brake |  Extension (15 cm) |  Clutch (CPR position) |
| | |  5th wheel (only R150) | |  Retention bow |
| | | | |  Wheel frame |